


AMG-415HX/416HX



FEATURES:

- Sony EX-View HAD sensor
- Video / DC Drive
- AC or DC/AC Dual voltage

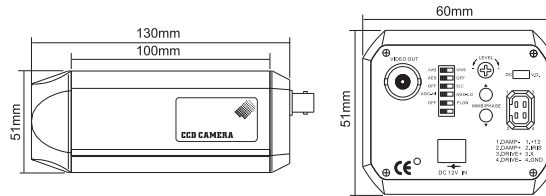

SPECIFICATIONS

Model No.	AMG-415HX	AMG-416HX
Image Device	1/3" Sony EX-View HAD	1/3" Sony EX-View HAD (Hi-Res.)
Picture Elements	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582
Resolution	380 TVL	470 TVL
Min. Illumination	0.05 Lux / F1.2	0.07 Lux / F1.2
S/N Ratio	More than 48dB	
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000	
Flickerless Mode	On / Off (NTSC:1/100, PAL:1/120)	
Gamma	0.45	
Iris Control	Video / DC Drive	
Lens Mount	C / CS	
White Balance	ATW (Auto) / MTW (Manual) switchable	
Gain Control	High / Low	
Back Light Comp.	On / Off	
Sync. System	Internal, Line Lock	
Video Output	1 Vp-p / 75 Ohms	
Power Supply	AC24V, AC110V, AC100~240V, DC12V/AC24V Dual (option)	
Power Consumption	3.5W max.	4W max.
Operating Temp.	-10°C ~ 50°C	



1777 Atlanta Ave.
Suite G6
Riverside, CA 92507
888-731-1436
www.amgctv.com